
AvaAluminum Minimal Sliding 116

A minimal aluminum sliding door for large openings, where glass makes up 94% of the product and the only visible profile is 13/16" at the meeting stile. Thermally broken profiles 4-9/16" and 7-3/16" deep.

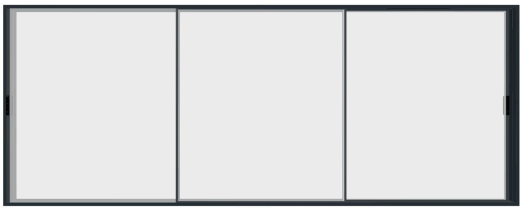

PERFORMANCE

Thermal insulation	**U-factor 0.22**
Sound insulation	**41 dB**
Security	**Multipoint locking for burglary protection**

TECHNICAL DATA

Profile	**Aluminum profiles with thermal break, 4-9/16" and 7-3/16" build depths**
Visible profile	**Only 13/16" visible at the meeting stile between panels**
Glazed area	**94% of the whole product**
Max size (2 panels)	**173-1/4" x 118-1/8"**
Max glass area (2 panels)	**129 sq ft**
Glass	**Double or triple glazing, max 1-3/16" thick**
Configurations	**Adaptable heights and sizes for 2, 3 or 4 sliding panels**
Width extension	**Maximum width can be extended with special profile coupling systems**
Sliding	**Operation on rollers; optional 3-track systems**
Locking	**Multipoint locking**
Handle	**Handle for easy operation**
Warranty	**5 years**
Recyclability	**Recyclable**

OPENING TYPES

- Sliding
- Pocket sliding (into the wall)

OPTIONS

- **Glass**: Burglar-resistant, tempered (safety) or frosted glass; double or triple glazing up to 1-3/16".
- **Colors**: White, matte, metallic and textured finishes, woodgrain effects, two-tone, and even antibacterial paint. Shown in pearl white, anthracite gray, light gray, ivory, chocolate brown, matte black, oxide red and dark green.
- **Handles and locks**: Handles and locking systems in a range of shapes and colors.
- **Tracks**: Optional 3-track sliding systems.
- **Pocket installation**: Panels can slide into the wall for a wider clear opening.
- **Wider spans**: Special profile coupling systems extend the maximum width.
- **Panel count**: 2, 3 or 4 sliding panels.